

Laboratory measurement of airborne sound insulation of small building elements Element-normalized level difference according to BS EN 20140-10:1992 BRE horizontal transmission suite (B9 051-053)

Client:

Rytons Building Products Ltd

Test date: 23/07/2007

Test number: L107-153

Test element: Open window

....

Filler wall area:

9.8 m²

Description:

TAL4SET ventilator assembly;

x1 MFAB, TAL4000 AirLiner, LF80 Internal

Source room volume:

130 m³

Air temperature:

19 °C

Receive room volume:

115 m³

Air relative humidity:

71 %

Frequency	Reverberation	Background	Source	Receive	D _{n,e}	٦
	time	level	level	level		١
(Hz)	(s)	(dB)	(dB)	(dB)	(dB)	-
50	2.64	26.3	91.8	58.9	35.7	٦
63	1.76	20.8	100.0	69.4	31.7	ŀ
80	1.98	14.4	99.4	64.5	36.6	k
100	1.69	13.0	100.3	59.1	42.1	ŀ
125	1.98	9.2	102.9	60.5	44.1	-
160	1.74	21.1	102.3	59.8	42.7	;
200	2.00	37.0	102.3	57.5	45.2	-
250	1.80	15.4	100.1	58.0	42.0	١
315	1.64	15.8	100.0	66.0	33.5	۱
400	1.66	19.2	99.6	65.3	33.9	1
500	1.64	11.4	99.0	61.3	37.1	1
630	1.58	10.8	98.4	61.7	36.1	١
800	1.50	10.0	97.5	62.8	33.8	1
1,000	1.50	17.5	96.3	60.2	35.2	۱
1,250	1.49	10.9	98.1	56.2	40.9	
1,600	1.49	5 .7	99.0	58.9	39.1	
2,000	1.52	6.2	97.5	56.1	40.5	1
2,500	1.51	7.2	97.8	55.9	41.0	
3,150	1.50	9.4	98.1	54.7	42.5	
4,000	1.40	10.8	98.9	52.1	45.6	
5,000	1.26	8.1	95.8	47.7	46.4	1

x Adjusted for flanking transmission

o Correction = 1.3 dB

Rating according to BS EN ISO 717-1	:1997					
$D_{\text{n,e,w}}(C;C_{\text{tr}}) = 38 (0;-1) \text{ dB}$	C 50-3150	= 0 dB	C ₅₀₋₅₀₀₀	= 1 dB	C ₁₀₀₋₅₀₀₀	= 1 dB
	C _{tr,50-3150}	= -1 dB	C _{tr,50-5000}	= -1 dB	C _{tr,100-5000}	= -1 dB
Evaluation based on laboratory measurement resu	Its obtained by an engin	eering method				

Based on the data provided in BS EN 20140-2:1993 it is estimated that the measurement uncertainty should not exceed ± 1 dB for the single-number quantity ($D_{n,e,w}$) and should not exceed the values in Table A1 of BS EN 20140-2:1993 for the data in the individual third octaves ($D_{n,e,w}$)

This page may only be distributed with the test report in its entirety and in accordance with the terms and conditions of the contract

Laboratory airborne sound insulation testing of Rytons Building Products Ltd ventilator systems



Laboratory measurement of airborne sound insulation of small building elements Element-normalized level difference according to BS EN 20140-10:1992 BRE horizontal transmission suite (B9 051-053)

Client:

Rytons Building Products Ltd

Test date: 23/07/2007

Test number: L107-153

Test element: Open window

Filler wall area:

9.8 m²

Description:

TAL4SET ventilator assembly;

x1 MFAB, TAL4000 AirLiner, LF80 Internal

Source room volume:

130 m³

Air temperature:

19 °C


Receive room volume:

115 m³

Air relative humidity:

71 %

Receive room volume:						
Frequency	D _{n,e} One-third					
(Hz)	octave					
	(dB)	l				
50	35.7	c				
63	31.7	c				
80	36.6	c				
100	42.1	c				
125	44.1	þ				
160	42.7	ļ				
200	45.2	l				
250	42.0	l				
315	33.5					
400	33.9					
500	37.1					
630	36.1	١				
800	33.8	1				
1,000	35.2	l				
1,250	40.9					
1,600	39.1	1				

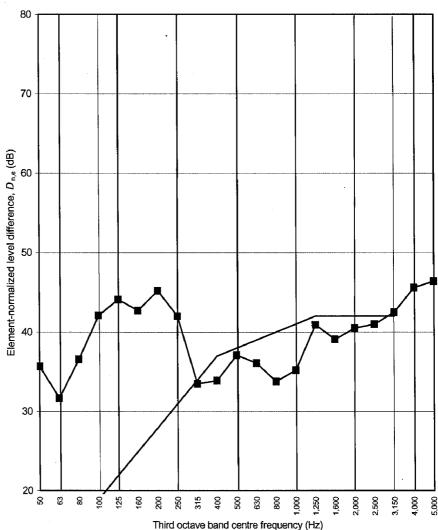

o Correction = 1.3 dB

2,000

2,500

3,150 4,000

5,000

Rating according to BS EN ISO 717-1:1997

40.5

41.0

42.5

45.6

46.4

 $D_{n,e,w}(C;C_{tr}) = 38 (0;-1) dB$

= 0 dB

= -1 dB

C₅₀₋₅₀₀₀ $C_{\text{tr,50-5000}}$ = 1 dB= -1 dB C₁₀₀₋₅₀₀₀ C_{tr,100-5000} = 1 dB= -1 dB

Evaluation based on laboratory measurement results obtained by an engineering method

C₅₀₋₃₁₅₀

C_{tr.50-3150}

Based on the data provided in BS EN 20140-2:1993 it is estimated that the measurement uncertainty should not exceed ±1 dB for the single-number quantity (D_{n.e.w}) and should not exceed the values in Table A1 of BS EN 20140-2:1993 for the data in the individual third octaves (D_{n.e.w})

This page may only be distributed with the test report in its entirety and in accordance with the terms and conditions of the contract

x Adjusted for flanking transmission

