



## Technical Data Sheet

### Rytons Hit & Miss Ventilator '9x6'

#### Dimensional Drawing

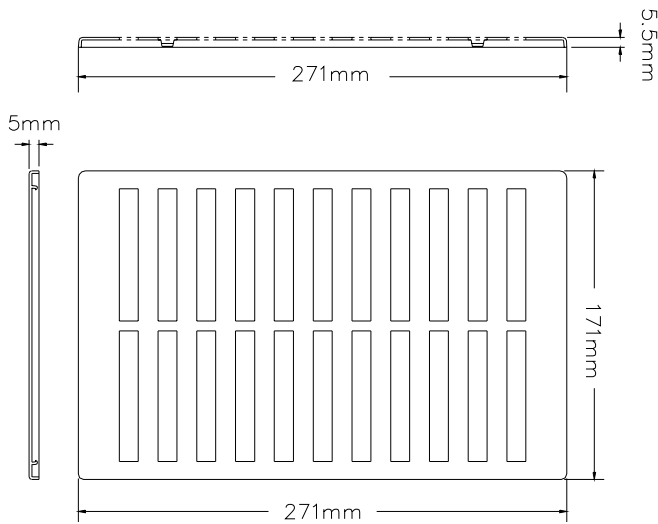

Irish Reg. Stat.

#### Main Uses, Features and Benefits

- Adjustable background ventilator for rooms.
- Small space and cupboard ventilator.
- Integral flyscreen with concealed fixings.
- Flush face and low profile.
- Compatible with Rytons '9x6' AirLiners®.
- U.V. stabilised against deterioration by sunlight.
- Available in 'VO' (the highest rated) flame-retardant material.



**F30 Accessories/Sundry Items for Brick/Block/Stone Walling**  
Specification Clauses 16, 165  
**U90 General Ventilation - Domestic**  
Specification Clauses 36, 38, 61, 360, 380, 505

#### Photo Library



#### Product Specification Code

Rytons HM85F.

Rytons HMFR85F (flame-retardant).

#### Size

271mm (L) x 171mm (H).

R14 AutoCAD drawing available by e-mail.

#### Free Area

8600mm<sup>2</sup> (86cm<sup>2</sup>) (13¼"²) per unit.

#### Composition

U.V. stabilised high impact polystyrene.

#### Colours

White.

#### Specification Paragraph

Manufacturer:

Rytons Building Products Ltd Tel: 01536 511874 Fax: 01536 310455

Email: admin@rytons.com Web: www.vents.co.uk (updated regularly)

Product ref:

- Rytons Hit & Miss Ventilator '9x6' (ref HM85F to BBA 94/3071)


- Rytons Flame-Retardant Hit & Miss Ventilator '9x6' (ref HMFR85F to BBA 94/3071)

Size: 271mm Long x 171mm High

#### Installation

Pull off flyscreen from front cover. Fasten flyscreen over opening. Align front cover with flyscreen and 'snap' into position.

#### Other Sizes Available

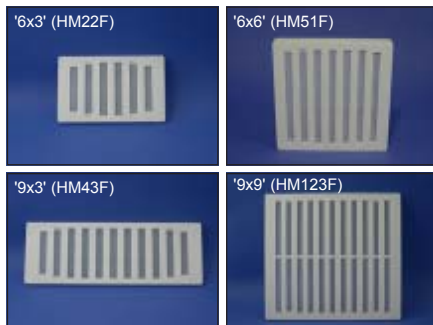

## Technical Data Sheet

### Rytons Hit & Miss Ventilator '9x6'

#### **BBA Approval**

Rytons has **73** British Board of Agrément approved products; the largest range on the market. BBA certification is third party evaluation and accreditation, and approved products are accepted by building control officers, architects, engineers and surveyors nationwide. The NHBC also accept products approved by the BBA when used as stated in the relevant BBA certificate. Rytons also has an Irish Building Regulation Statement for each of their three BBA certificates.

#### **UK Regulations, Standards and Guidelines**

The Building Regulations 2000, Approved Document F 2006 edition.  
The Building (Scotland) Regulations 2004, Mandatory Standard 3.14.  
The Building Regulations (Northern Ireland) 2000, Technical Booklet K.  
British Standard BS 5250:2002.

#### **Important Note**

Hit & Miss Ventilators are not permitted to ventilate heat producing appliances as they may be closed, stopping the air flow.

#### **Handling Information**

Box quantity: 25 number.  
Box size: 28cm (W) x 18cm (H) x 19cm (D).  
Box weight: 2.4kg.

## Questions

#### **What is the benefit of 'VO' rated flame-retardant material and how does it differ from standard plastic?**

In the event of a fire flame-retardant grilles will melt (without dropping molten plastic) rather than burst into flames. If the temperature gets so hot there is a flame it would self-extinguish reducing the chances of fire spreading between rooms/buildings etc.

#### **Can the vent be painted?**

Yes, with an acrylic or enamel based paint. A test area should be carried out first and care must be taken not to block the flyscreen.

#### **Is colour matching available?**

This product is available to order in non-standard colours, choosing from either a Rytons colour or supplying a RAL number. For further information ask about Rytons Colour Matching service.

#### **Why is the vent larger than 9" x 6"?**

The description '9x6' is a nominal size with the vent larger to cover cavity liners and damaged areas.



Please recycle printouts where facilities exist.