


Technical Data Sheet Rytons Loft Access Hatches


www.vents.co.uk (search codes: LAH565FR and LAH821FR)

April 2010

Photo Library

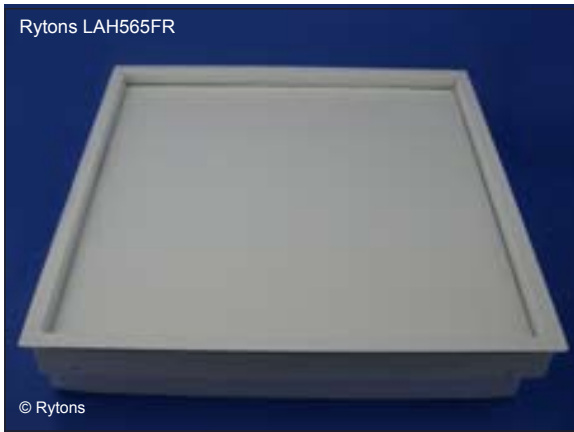

Rytons Fire Retardant Push-up Loft Access Hatches

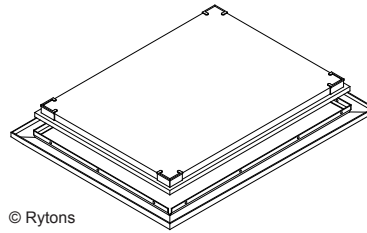

© Rytons

**1 Hour
Fire Rating**

Main Uses, Features and Benefits

- Fire retardant loft hatches available in two sizes.
- Allow convenient access to the roof space.
- Durable powder coated zintec steel frame and lid.
- 1 hour fire rating.
- Virtually eliminates air and moisture ingress when closed.
- GWP rating of less than 5.
- Not affected by humid atmospheres or condensation.
- Fixing screws included.
- Supplied in a strong cardboard box ready to fix.

Product Specification Code	Product Specification Code
Rytons LAH565FR - 575 x 575mm	Rytons LAH821FR - 572 x 871mm

Size

LAH565FR: Overall frame size: 575mm (W) x 575mm (L).
Lid size: 530mm (W) x 530mm (L).
LAH821FR: Overall frame size: 572mm (W) x 871mm (L).
Lid size: 545mm (W) x 845mm (L).

Composition

Frame: Powder coated zintec steel.
Lid: Powder coated zintec steel.

Insulation: All insulation used is CFC and HCFC free, ODP zero and compliant to Part L requirements and Eco Homes standards of a Global Warming Potential (GWP) rating of less than 5. Mineral wool is Knauf RS45 Slab.

Thermal Performance

U value of 0.35.
100mm 45kg/m³ mineral wool slab insulation.

Colours

White.

Maintenance

Wipe clean with a soft damp cloth.

UK Regulations, Standards and Guidelines

British Standard BS 5250:2002 (amended 23 December 2005)

A loft access trap should be kept closed when not in use.

Handling Information

Box quantity: 1 number.
Box sizes: LAH565FR 58cm (W) x 59cm (H) x 10.5cm (D).
LAH821FR 60cm (W) x 92cm (H) x 11cm (D).
Box weights: LAH565FR 4.8kg, LAH821FR 6.6kg.



Please recycle printouts where facilities exist.

