



Technical Data Sheet

Rytons Metal Louvre Ventilators '12x12'

Dimensional Drawing

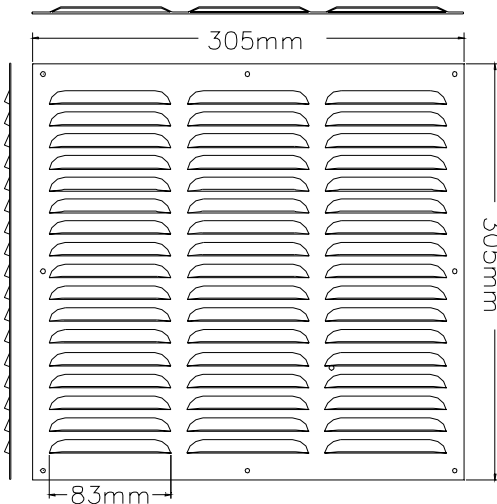

Main Uses, Features and Benefits

- Room and cupboard ventilators.
- Low profile fixed open louvres.
- Strong, durable, slim and lustrous.
- Aluminium (AL).
- Brass anodised aluminium (BA).

F30 Accessories/Sundry Items for Brick/Block/Stone Walling


Specification Clauses 16, 165

U90 General Ventilation - Domestic

Specification Clauses 36, 38, 61, 360, 380, 505

NS5Plus

Photo Library

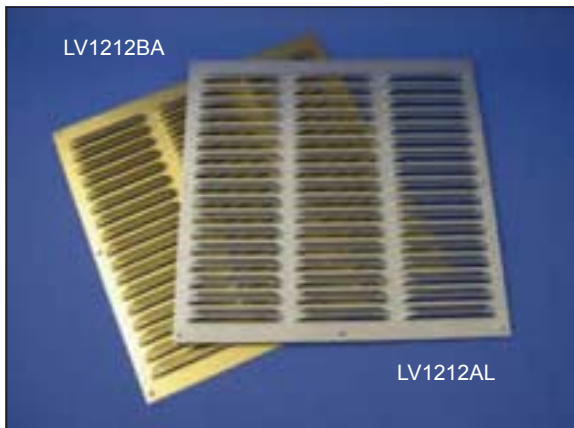

Product Specification Code

AL: Rytons LV1212AL.

BA: Rytons LV1212BA.

Size

305mm (L) x 305mm (H).

R14 AutoCAD drawing available by e-mail.

Free Area

27137mm² (271.37cm²) (42"²) per unit.

Composition

AL: 0.8mm (20 gauge) aluminium.

BA: 0.8mm (20 gauge) brass anodised aluminium.

Melting Point

Aluminium: 500°C

Colours

AL: Self colour aluminium.

BA: Brass.

Specification Paragraph

Manufacturer:

Rytons Building Products Ltd Tel: 01536 511874 Fax: 01536 310455

Email: admin@rytons.com Web: www.vents.co.uk (updated regularly)

Product ref:

- Rytons Aluminium Louvre Ventilator '12x12' (ref LV1212AL)


- Rytons Brass Anodised Aluminium Louvre Ventilator '12x12' (ref LV1212BA)

Size: 305mm Long x 305mm High

Installation

Position over opening and fasten into place.

Other Sizes and Styles Available

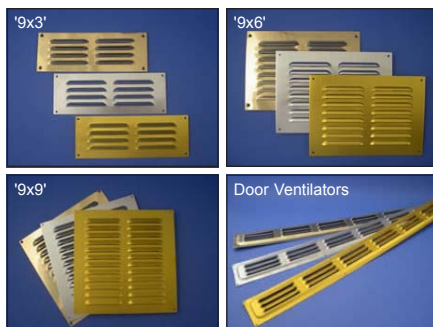

RYTONS

Building Products

www.vents.co.uk

Innovation in Ventilation

Naturally

+44 (0)1536 511874

+44 (0)1536 310455

lit@rytons.com

www.vents.co.uk **Hardware** section

(search codes: LV1212AL and LV1212BA)

July 2008

Technical Data Sheet

Rytons Metal Louvre Ventilators '12x12'

UK Regulations, Standards and Guidelines

For heat producing appliances (including solid fuel) refer to:

The Building Regulations 2000, Approved Document J.

The Building (Scotland) Regulations 2004, Mandatory Standard 3.21.

The Building Regulations (Northern Ireland) 2000, Technical Booklet L.

British Standard BS 5440-2:2000.

For decorative fuel effect gas fires refer to:

British Standard BS 5871-3:2005.

Handling Information

Box quantities: 25 number.

Box weights: 5.1kg.

Questions

Are aluminium louvre vents suitable for external use in a marine environment?

Aluminium is not suitable for use in a marine environment. Grade 3/6 stainless steel would be suitable.

Can I point the louvres backwards for a flush finish?

Yes, all Rytons metal Louvre Ventilators are surface mounted so can be fitted with louvres facing forwards as standard or backwards for a flush finish.

Are there any other sizes and finishes available?

Contact our sales office for up to date details of non-standard sizes and finishes.



Please recycle printouts where facilities exist.

