



Technical Data Sheet

Rytons Metal Louvre Ventilators '12x12'

www.vents.co.uk (search codes: LV1212AL and LV1212BA)

April 2010

Dimensional Drawing

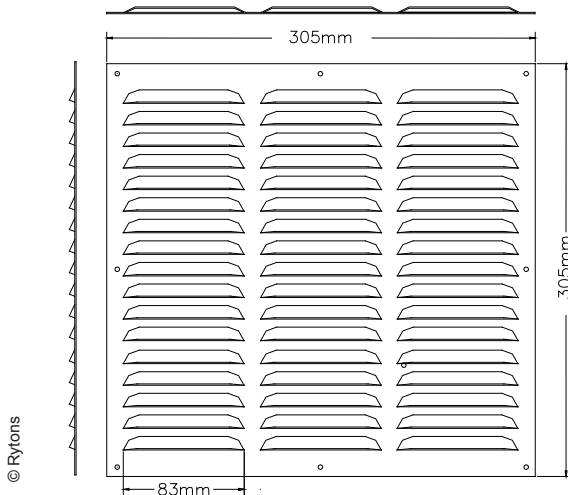


© Rytons

Main Uses, Features and Benefits

- Room and cupboard ventilators.
- Low profile fixed open louvres.
- Strong, durable, slim and lustrous.
- Aluminium (AL).
- Brass anodised aluminium (BA).

Photo Library

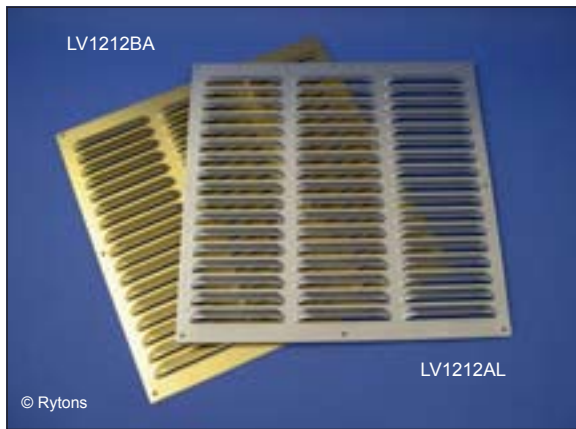

F30 Accessories/Sundry Items for Brick/Block/Stone Walling

Specification clauses 16, 165

U90 General Ventilation - Domestic

Specification Clauses 36, 38, 61, 360, 380, 505

Product Specification Code	Free Area
AL: Rytons LV1212AL	27137mm ² (271.37cm ²) (42 ^{m²}) per unit
BA: Rytons LV1212BA	27137mm ² (271.37cm ²) (42 ^{m²}) per unit

Size

305mm (L) x 305mm (H).

AutoCAD drawing available by email.

Composition

AL: 0.8mm (20 gauge) aluminium.

BA: 0.8mm (20 gauge) brass anodised aluminium.

Melting Point

Aluminium: 500°C

Colours

AL: Self colour aluminium.

BA: Brass.

Specification Paragraph

Manufacturer: Rytons Building Products Ltd

T: 01536 511874, F: 01536 310455, E: admin@rytons.com

Visit our website at www.vents.co.uk


Product ref:

- Rytons Aluminium Louvre Ventilator '12x12' (ref LV1212AL)

- Rytons Brass Anodised Aluminium Louvre Ventilator '12x12' (ref LV1212BA)

Size: 305mm Long x 305mm High

Sizes and Styles Available in Metal

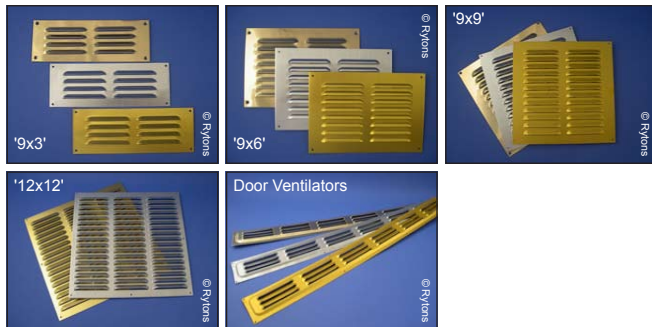

Can't find the size, colour or finish you require?
Talk to Rytons Sales Office about specials.

Technical Data Sheet

Rytons Metal Louvre Ventilators '12x12'

www.vents.co.uk (search codes: LV1212AL and LV1212BA)

April 2010

Installation

Position over opening and fasten into place.

UK Regulations, Standards and Guidelines

For heat producing appliances (including solid fuel) refer to:

The Building Regulations 2000, Approved Document J.

The Building (Scotland) Regulations 2004, Mandatory Standard 3.21.

The Building Regulations (Northern Ireland) 2000, Technical Booklet L.

British Standard BS 5440-2:2000.

For decorative fuel effect gas fires refer to:

British Standard BS 5871-3:2005.

Handling Information

Box quantities: 25 number.

Box weights: 5.1kg.

Questions

Are aluminium louvre vents suitable for external use in a marine environment?

Aluminium is not suitable for use in a marine environment. Grade 3/6 stainless steel is a better option.

Can I point the louvres backwards for a flush finish?

Yes, all Rytons metal Louvre Ventilators are surface mounted so can be fitted with louvres facing forwards as standard or backwards for a flush finish.

Are there any other sizes and finishes available?

Contact our sales office for up to date details of non-standard sizes and finishes.



Please recycle printouts where facilities exist.

