

Technical Data Sheet

Rytons Metal Door Ventilators

Dimensional Drawing

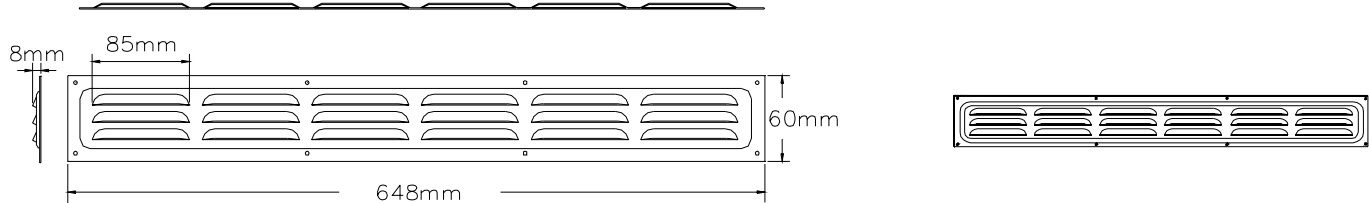


Photo Library



Main Uses, Features and Benefits

- Through door room and cupboard ventilators.
- Low profile fixed open louvres.
- Strong, durable, slim and lustrous.
- Aluminium (ALU).
- Brass anodised aluminium (BAA).
- Solid brass (BRA).



P21 Door/Window Ironmongery
Specification Clauses 66, 895

Product Specification Code

ALU: Rytons LV262ALU.
BAA: Rytons LV262BAA.
BRA: Rytons LV262BRA.

Size

648mm (L) x 60mm (H).
R14 AutoCAD drawing available by e-mail.

Free Area

9774mm² (97.74cm²) (15"²) per unit.

Number of Louvres

3 rows of 6 louvres.

Composition

ALU: Aluminium.
BAA: Brass anodised aluminium.
BRA: Solid brass.

Melting Point

Aluminium: 500°C
Brass: 800°C

Colours

ALU: Self colour aluminium.
BAA: Brass.
BRA: Polished brass.

Specification Paragraph

Manufacturer:

Rytons Building Products Ltd Tel: 01536 511874 Fax: 01536 310455
Email: admin@rytons.com Web: www.vents.co.uk (updated regularly)
Product ref:


- Rytons Door Ventilator Aluminium (ref LV262ALU)
- Rytons Door Ventilator Brass Anodised Aluminium (ref LV262BAA)
- Rytons Door Ventilator Brass (ref LV262BRA)

Size: 648mm Long x 60mm High

Installation

Position over opening and fasten into place.

Other Sizes and Styles Available

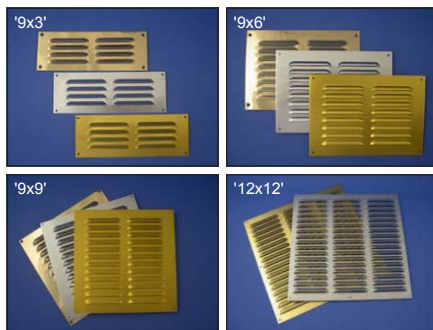

Handling Information

Box quantities: 10 number.
Box weights: LV262ALU 0.85kg, LV262BAA 0.85kg,
LV262BRA 3.1kg.



Please recycle printouts where facilities exist.