


Technical Data Sheet

Rytons Louvre Ventilators '6x3'


www.vents.co.uk (search codes: LV47 and LV25F)

April 2010

Dimensional Drawing

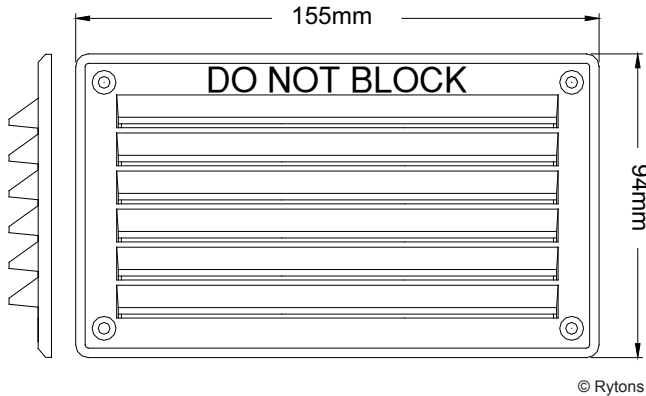


Rytons LV47



© Rytons

Rytons LV25F



© Rytons

Approvals and Testing



Photo Library



Main Uses, Features and Benefits

- Small space ventilators.
- Available with and without a flyscreen.
- Use in the home, in boats and in caravans.
- Low profile fixed open louvres.
- Allow a high air flow for their size.
- Embossed with DO NOT BLOCK.
- For internal and external use.
- U.V. stabilised to protect against deterioration by sunlight.



F30 Accessories/Sundry Items for Brick/Block/Stone Walling

n55Plus

Specification clauses 16, 165

U90 General Ventilation - Domestic

Specification clauses 36, 38, 61, 62, 360, 380, 505, 510

Product Specification Code	Free Area
Rytons LV47	4748mm ² (47.48cm ²) (7¼"²) per unit
Rytons LV25F - Flyscreened	2567mm ² (25.67cm ²) (3¾"²) per unit

Size

155mm (L) x 94mm (H).

AutoCAD drawings available by email.

Composition

U.V. stabilised high impact polystyrene.

Colours

LV47: White.

LV25F: White.

Specification Paragraph

Manufacturer: Rytons Building Products Ltd

T: 01536 511874, F: 01536 310455, E: admin@rytons.com

Visit our website at www.vents.co.uk

Product ref:

- Rytons Louvre Ventilator '6x3' (ref LV47 to BBA 94/3071)

- Rytons Flyscreened Louvre Ventilator '6x3' (LV25F to BBA 94/3071)

Size: 155mm Long x 94mm High




Technical Data Sheet

Rytons Louvre Ventilators '6x3'

www.vents.co.uk (search codes: LV47 and LV25F)

April 2010

Sizes and Styles Available in Plastic

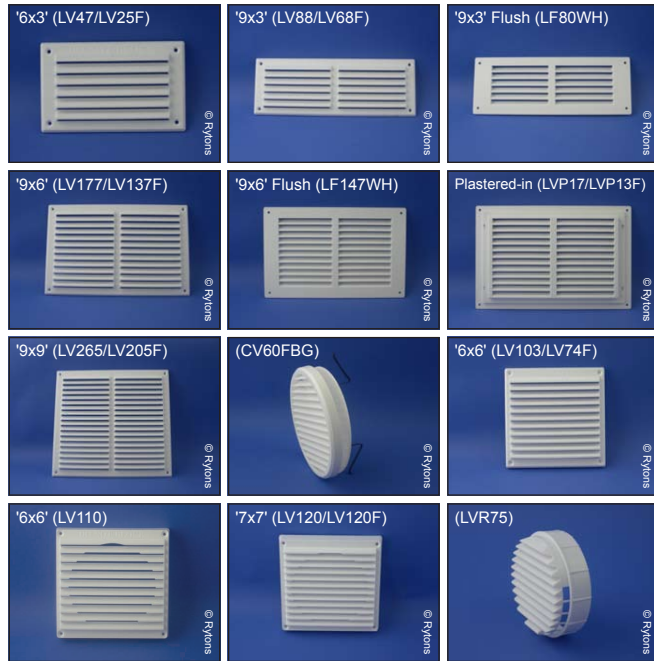

Can't find the size, colour or finish you require?
Talk to Rytons Sales Office about specials.

Installation

Position over opening and fasten into place.

BBA Approval

Rytons has **73** British Board of Agrément approved products; the largest range on the market. BBA certification is third party evaluation and accreditation, and approved products are accepted by building control officers, architects, engineers and surveyors nationwide. The NHBC also accept products approved by the BBA when used as stated in the relevant BBA certificate. Rytons also has an Irish Building Regulation Statement for each of their three BBA certificates.

UK Regulations, Standards and Guidelines

For heat producing appliances (including solid fuel) refer to:

The Building Regulations 2000, Approved Document J.

The Building (Scotland) Regulations 2005, Mandatory Standard 3.21.

The Building Regulations (Northern Ireland) 2000, Technical Booklet L.

British Standard BS 5440-2:2000.

For decorative fuel effect gas fires refer to:

British Standard BS 5871-3:2005.

Important Note

Rytons Flyscreened Louvre Ventilator (LV25F) may not be used to ventilate a heat producing appliance because it incorporates a flyscreen.

Handling Information

Box quantities: 10 number.

Box sizes: 16cm (W) x 12cm (H) x 14cm (D).

Box weights: LV47 0.315kg, LV25F 0.45kg.

Questions

Can the vent be painted?

Yes, with an acrylic or enamel based paint. A test area should be carried out first and care must be taken not to block the flyscreen.

Is colour matching available?

This product is available to order in non-standard colours, choosing from either a Rytons colour or supplying a RAL number. For further information ask about Rytons colour matching service.

Why is the vent larger than 6" x 3"?

The description '6x3' is a nominal size with the vent larger to cover any damage to the surrounding area.



Please recycle printouts where facilities exist.

