


Technical Data Sheet

Rytons Refurbishment Ventilator

www.vents.co.uk (search code: RV600)


April 2010

Dimensional Drawing

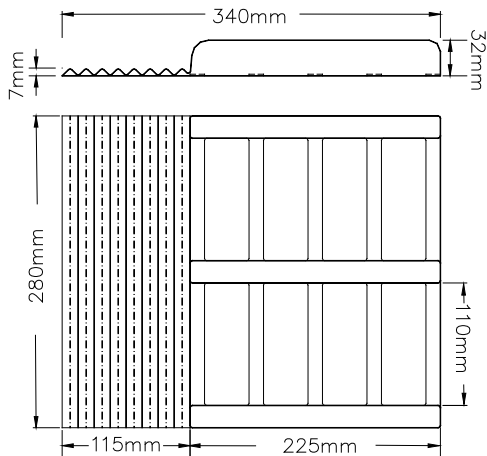


© Rytons

In-Situ Line Drawing

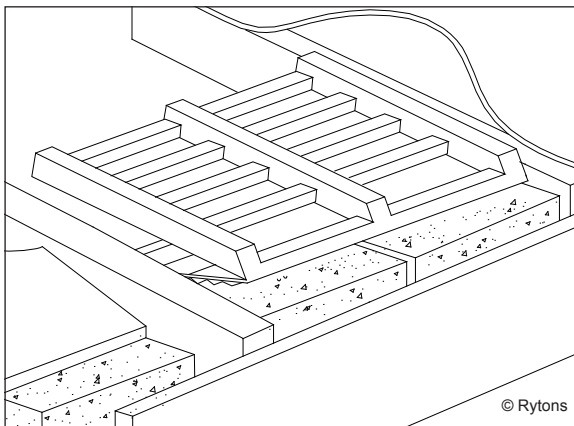

© Rytons

In-Situ Drawing

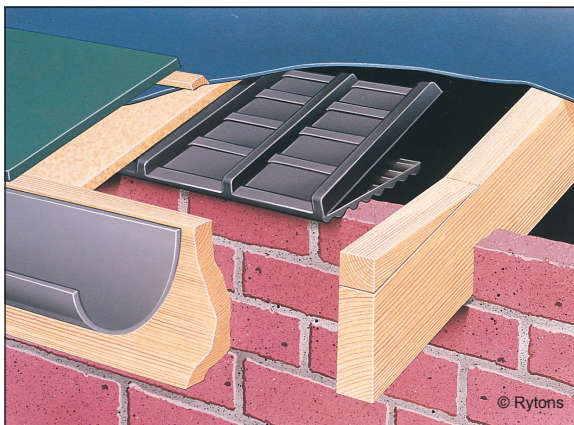


© Rytons

Approvals and Testing



Irish Reg. Stat.



© Rytons

Main Uses, Features and Benefits

- Roof ventilator for refurbishment projects.
- One size suits all rafter spacings.
- Maintains the path of air into the roof void.
- Fitted from the inside.

H60 Plain Roof Tiling

H61 Fibre Cement Slating

H62 Natural Slating

H65 Single Lap Roof Tiling

Specification Clauses 47, 355

NSPlus

Product Specification Code	Free Area
Rytons RV600	7200mm ² per unit
Equivalent to a continuous opening 10mm wide	

Size

280mm (L) x 225mm (D) (excluding flap) x 32mm (H).

AutoCAD drawing available by email.

Composition

PVC.

Colours

Clear.

Specification Paragraph

Manufacturer: Rytons Building Products Ltd

T: 01536 511874, F: 01536 310455, E: admin@rytons.com

Visit our website at www.vents.co.uk

Product ref:

Rytons Refurbishment Ventilator Clear (ref RV600 to BBA 94/3070)

Installation

Insert from within the roof void once the roof has been completed. Recommended for use with Rytons Push & Lock® Ventilator (PL235) on refurbishment projects. Recommended for use with any of Rytons soffit ventilators or over fascia ventilators on new build projects. Consideration should be given to using Rytons EavesGuard® (EG920) to prevent felt rot.


Technical Data Sheet

Rytons Refurbishment Ventilator

www.vents.co.uk (search code: RV600)

April 2010

Photo Library

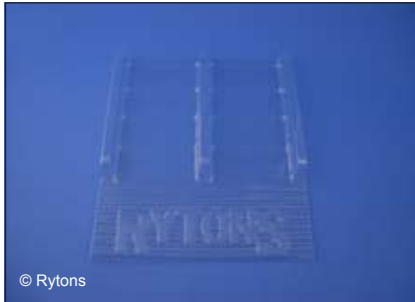

BBA Approval

Rytons has 73 British Board of Agrément approved products; the largest range on the market. BBA certification is third party evaluation and accreditation, and approved products are accepted by building control officers, architects, engineers and surveyors nationwide. The NHBC also accept products approved by the BBA when used as stated in the relevant BBA certificate. Rytons also has an Irish Building Regulation Statement for each of their three BBA certificates.

UK Regulations, Standards and Guidelines

British Standard BS 5250:2002 (amended 23 December 2005)

8.4.2.2.3.2 The openings should be equivalent in area to a continuous opening of not less than:

- a) 25mm x length at eaves for pitches of 15° or less.
- b) 10mm x length at eaves for pitches of more than 15°.

8.4.2.2.3.3 Additional ventilation openings, equivalent in area to a continuous opening of 5mm, should be provided at high level in:

- a) roofs where the pitch exceeds 35°.
- b) roofs of any pitch with a span greater than 10m.
- c) lean-to and mono-pitch roofs.

8.4.2.2.3.4 Ensure that:

- a) all airpaths between the insulation and the underlay, including those provided by proprietary eaves ventilation products, are at least 25mm deep, irrespective of opening size.
- b) ventilation openings are not blocked by insulation material, dust, airborne debris, paint or frost.
- d) entry of birds and large insects is prevented; to achieve that, and to avoid excessive airflow resistance, a normal mesh/grille size of 4mm is recommended.

The Building Regulations 2000, Approved Document C 2004 edition.

The Building (Scotland) Regulations 2007, Mandatory Standard 3.15.

The Building Regulations (Northern Ireland) 2000, Technical Booklet C.

NHBC Standards 2010, 7.2 Pitched Roofs - S11 (a).

Zurich Building Guarantee Solid Foundation Manual.

A roof will meet the requirements if it is designed and constructed in accordance with Clause 8.4 of BS 5250:2002.

Handling Information

Box quantity: 50 number.

Box size: 32cm (W) x 32cm (H) x 47cm (D).

Box weight: 3.5kg.

Questions

Is this the vent to use if roof ventilators have not been fitted?

Yes, Rytons Refurbishment Ventilator will get you out of trouble as each unit is easily fitted from inside the roof void. Remember ventilation is also required through the soffit or over the fascia for roof ventilators to work effectively.



Please recycle printouts where facilities exist.

