


A step by step guide to calculating the ventilation requirements of gas appliances

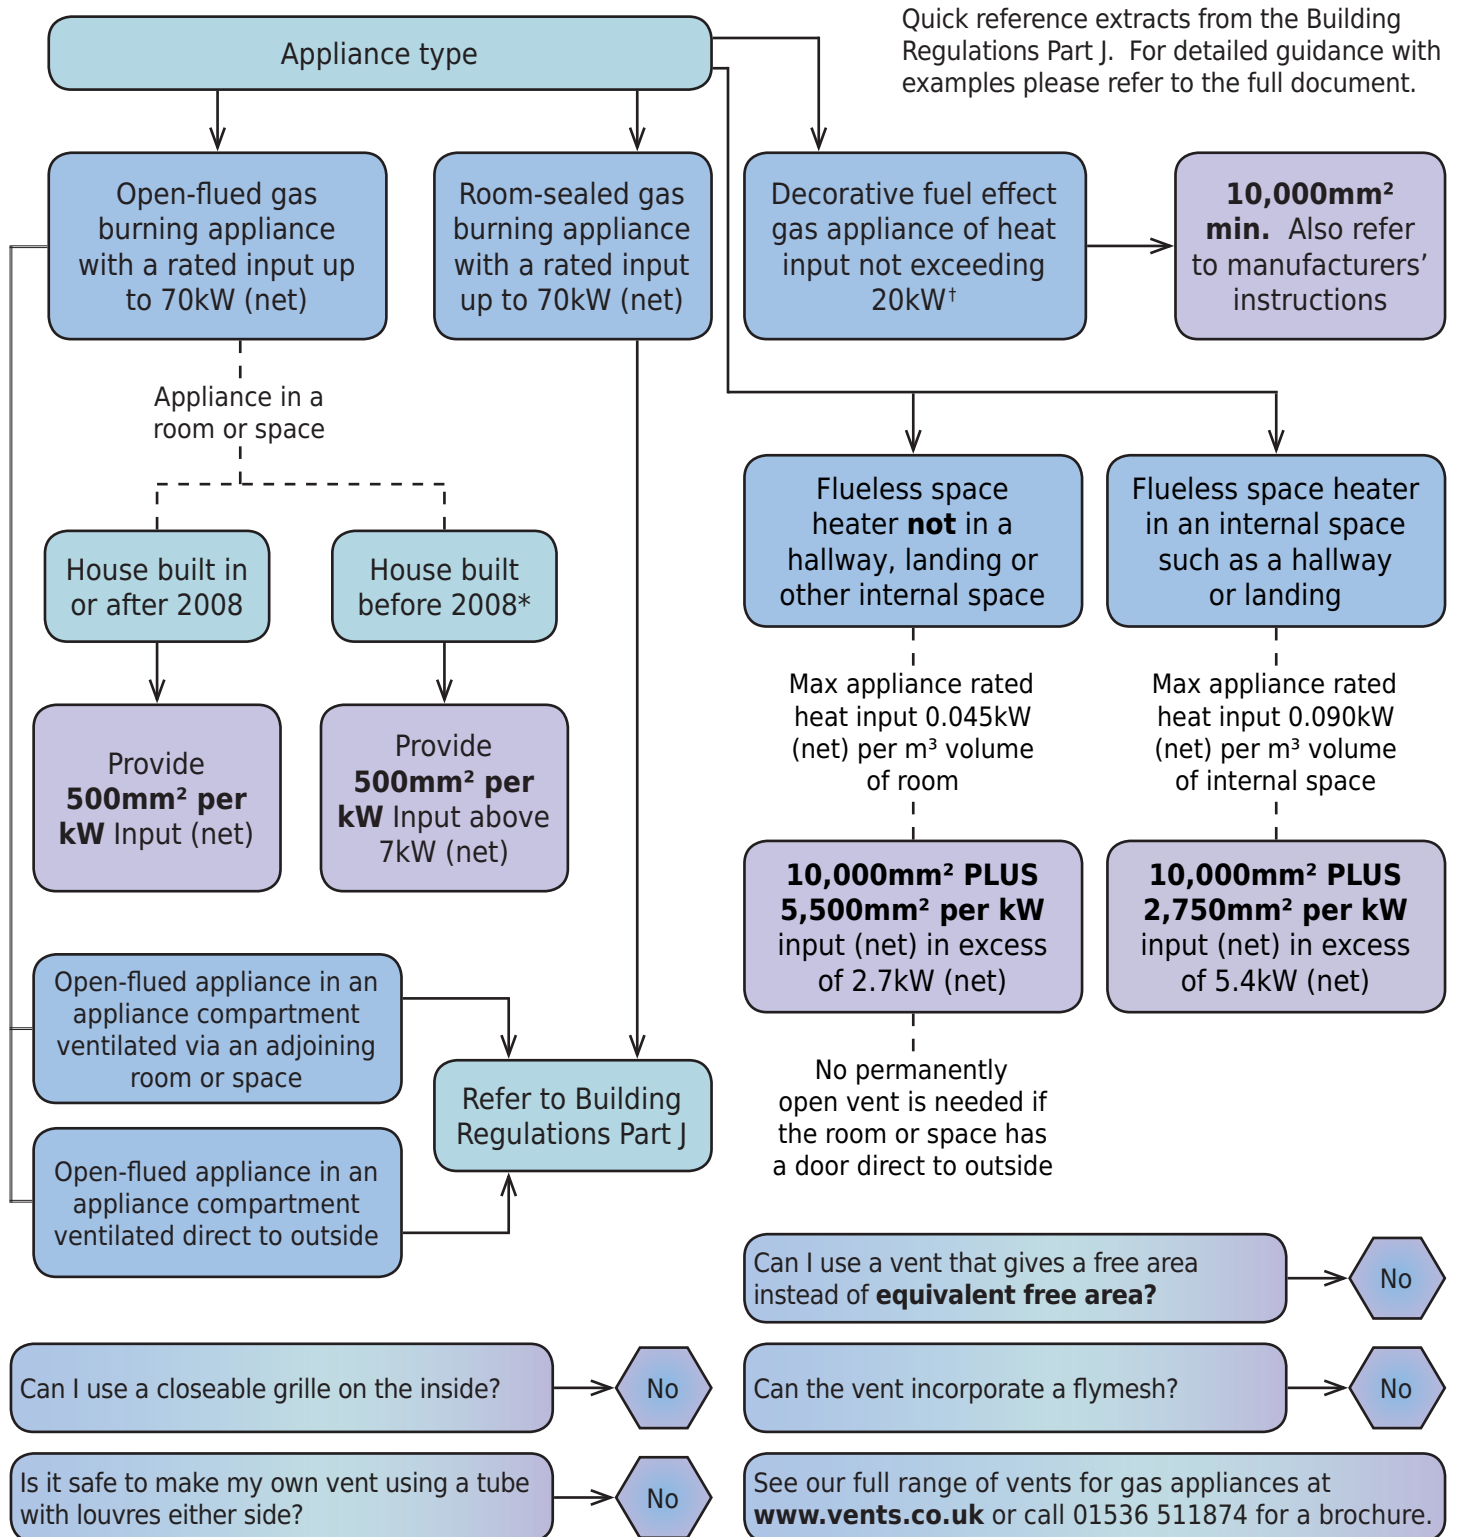

* If the house has been extensively upgraded for increased airtightness provide 500mm² per kW Input (net). Refer to Appendix F of Part J for details of measures that constitute significantly improving airtightness.

† BS 5871-3:2005